

KOYO

A


【單列深溝球軸承】
深溝球軸承



桃園市蘆竹區中興二街28號 TEL:+886-3-3235599 FAX:+886-3-3136966
線性滑軌、滾珠螺桿、直線軸承、精密軸心、萬向滾珠、滾珠軸承、銅自潤軸承、陶瓷軸承
<https://www.wjbmotion.com/> wjbrobot@gmail.com

A


單列深溝滾珠軸承
帶防塵蓋
帶密封圈
d10~(28) mm

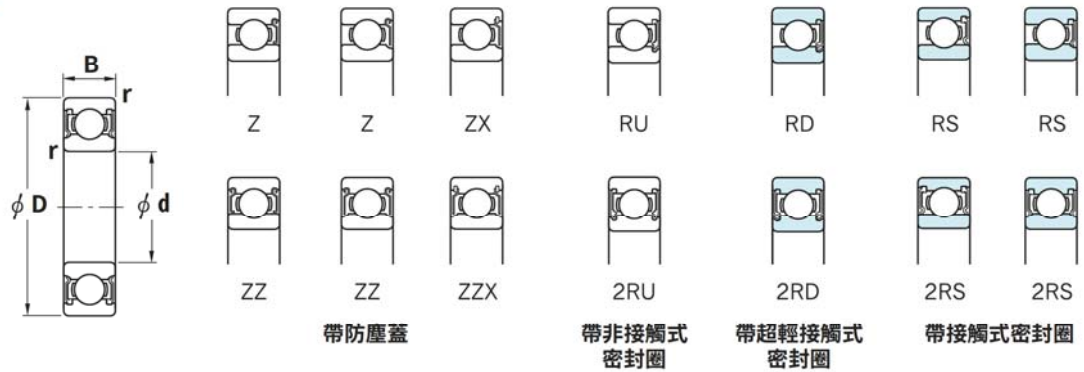

主要尺寸 (mm)				基本額定負荷 (kN)		系數 f_0	極限轉速 (min^{-1})				公稱型號				(參考) 質量 (kg) 開放型
d	D	B	r (最小)	C_r	C_{0r}		脂潤油		油潤滑		帶防塵蓋	帶非接觸式密封圈	帶超輕接觸式密封圈	帶接觸式密封圈	
							[Z, ZZ, RU, 2RU]	(RD, 2RD)	(RS, 2RS)	(Z)					
10	19	5	0.3	1.70	0.84	14.8	37 000	—	22 000	43 000	6800 ZZ	6800 2RU	—	6800 2RS	0.005
	22	6	0.3	2.70	1.25	14.0	34 000	—	21 000	41 000	6900 ZZ	6900 2RU	—	6900 2RS	0.010
	26	8	0.3	4.55	1.95	12.3	31 000	28 000	19 000	36 000	6000 ZZ	6000 2RU	6000 2RD	6000 2RS	0.019
	30	9	0.6	5.10	2.40	13.2	24 000	22 000	16 000	29 000	6200 ZZ	6200 2RU	6200 2RD	6200 2RS	0.032
	35	11	0.6	8.10	3.45	11.2	22 000	20 000	16 000	27 000	6300 ZZ	6300 2RU	6300 2RD	6300 2RS	0.053
12	21	5	0.3	1.90	1.05	15.3	33 000	30 000	20 000	39 000	6801 ZZ	6801 2RU	6801 2RD	6801 2RS	0.006
	24	6	0.3	2.90	1.45	14.5	31 000	28 000	18 000	36 000	6901 ZZ	6901 2RU	6901 2RD	6901 2RS	0.011
	28	8	0.3	5.10	2.40	13.2	27 000	24 000	17 000	32 000	6001 ZZ	6001 2RU	6001 2RD	6001 2RS	0.022
	32	10	0.6	6.80	3.05	12.3	22 000	20 000	15 000	27 000	6201 ZZ	6201 2RU	6201 2RD	6201 2RS	0.037
	37	12	1	9.70	4.20	11.1	20 000	18 000	15 000	25 000	6301 ZZ	6301 2RU	6301 2RD	6301 2RS	0.060
15	24	5	0.3	2.10	1.25	15.8	28 000	—	16 000	33 000	6802 ZZ	6802 2RU	—	6802 2RS	0.007
	28	7	0.3	4.30	2.25	14.3	26 000	23 000	15 000	30 000	6902 ZZ	6902 2RU	6902 2RD	6902 2RS	0.017
	32	9	0.3	5.60	2.85	13.9	23 000	21 000	14 000	27 000	6002 ZZ	6002 2RU	6002 2RD	6002 2RS	0.030
	35	11	0.6	7.65	3.75	13.2	20 000	18 000	13 000	24 000	6202 ZZ	6202 2RU	6202 2RD	6202 2RS	0.045
	42	13	1	11.4	5.45	12.3	17 000	15 000	12 000	20 000	6302 ZZ	6302 2RU	6302 2RD	6302 2RS	0.082
17	26	5	0.3	2.60	1.55	15.7	26 000	—	14 000	30 000	6803 ZZ	6803 2RU	—	6803 2RS	0.008
	30	7	0.3	4.60	2.55	14.7	23 000	21 000	13 000	28 000	6903 ZZ	6903 2RU	6903 2RD	6903 2RS	0.018
	35	10	0.3	6.00	3.25	14.4	21 000	19 000	12 000	25 000	6003 ZZ	6003 2RU	6003 2RD	6003 2RS	0.039
	40	12	0.6	9.55	4.80	13.2	17 000	15 000	12 000	21 000	6203 ZZ	6203 2RU	6203 2RD	6203 2RS	0.065
	47	14	1	13.6	6.65	12.4	15 000	14 000	10 000	18 000	6303 ZZ	6303 2RU	6303 2RD	6303 2RS	0.115
20	32	7	0.3	4.00	2.45	15.5	21 000	—	12 000	25 000	6804 ZZ	6804 2RU	—	6804 2RS	0.018
	37	9	0.3	6.35	3.70	14.7	19 000	17 000	11 000	23 000	6904 ZZ	6904 2RU	6904 2RD	6904 2RS	0.036
	42	12	0.6	9.40	5.05	13.9	17 000	15 000	10 000	21 000	6004 ZZ	6004 2RU	6004 2RD	6004 2RS	0.069
	47	14	1	12.8	6.65	13.2	15 000	14 000	9 700	17 000	6204 ZZ	6204 2RU	6204 2RD	6204 2RS	0.106
	52	15	1.1	15.9	7.85	12.3	14 000	13 000	9 500	17 000	6304 ZZ	6304 2RU	6304 2RD	6304 2RS	0.144
22	44	12	0.6	9.40	5.15	14.1	17 000	15 000	9 900	20 000	60/22 ZZ	60/22 2RU	60/22 2RD	60/22 2RS	0.073
	50	14	1	12.8	6.65	13.2	15 000	14 000	9 700	17 000	62/22 ZZ	62/22 2RU	62/22 2RD	62/22 2RS	0.118
	56	16	1.1	18.5	9.40	12.6	13 000	12 000	8 600	15 000	63/22 ZZ	63/22 2RU	63/22 2RD	63/22 2RS	0.201
25	37	7	0.3	4.30	2.95	16.0	18 000	—	10 000	21 000	6805 ZZ	6805 2RU	—	6805 2RS	0.022
	42	9	0.3	7.00	4.55	15.4	16 000	14 000	9 300	19 000	6905 ZZ	6905 2RU	6905 2RD	6905 2RS	0.041
	47	12	0.6	10.1	5.85	14.5	15 000	14 000	9 000	18 000	6005 ZZ	6005 2RU	6005 2RD	6005 2RS	0.080
	52	15	1	14.0	7.85	13.9	13 000	12 000	8 400	15 000	6205 ZZ	6205 2RU	6205 2RD	6205 2RS	0.128
	62	17	1.1	20.6	11.3	13.2	11 000	9 900	7 500	13 000	6305 ZZ	6305 2RU	6305 2RD	6305 2RS	0.232
28	52	12	0.6	12.4	7.40	14.5	14 000	13 000	8 100	16 000	60/28 ZZ	60/28 2RU	60/28 2RD	60/28 2RS	0.097
	58	16	1	17.9	9.75	13.4	12 000	11 000	7 600	14 000	62/28 ZZ	62/28 2RU	62/28 2RD	62/28 2RS	0.173
	68	18	1.1	23.5	13.1	13.3	10 000	9 000	6 900	12 000	63/28 ZZ	63/28 2RU	63/28 2RD	63/28 2RS	0.328

[備註] 適用於以上軸承的標準保持架型式，請與威峻傳動聯繫+886-3-3235599

單列深溝滾珠軸承
帶防塵蓋
帶密封圈
d30~(60) mm

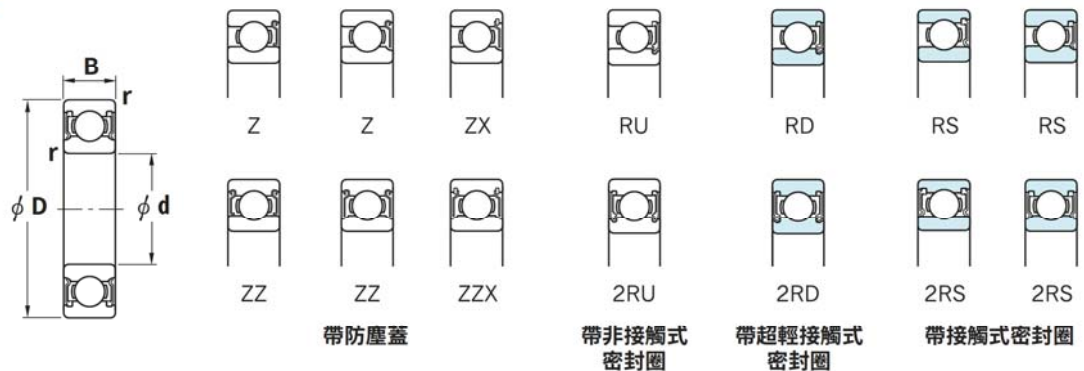


主要尺寸 (mm)				基本額定負荷 (kN)		系數 f_0	極限轉速 (min^{-1})				公稱型號				(參考) 質量 (kg) 開放型
d	D	B	r (最小)	C_r	C_{0r}		脂潤滑		油潤滑		帶防塵蓋	帶非接觸式密封圈	帶超輕接觸式密封圈	帶接觸式密封圈	
							$\left[\begin{matrix} Z, ZZ \\ RU, 2RU \end{matrix} \right]$	(RD, 2RD)	(RS, 2RS)	(Z)					
30	42	7	0.3	4.55	3.40	16.4	15 000	—	8 600	18 000	6806 ZZ	6806 2RU	—	6806 2RS	26
	47	9	0.3	7.25	5.00	15.8	14 000	13 000	8 200	17 000	6906 ZZ	6906 2RU	6906 2RD	6906 2RS	45
	55	13	1	13.2	8.25	14.7	13 000	12 000	7 500	15 000	6006 ZZ	6006 2RU	6006 2RD	6006 2RS	0.116
	62	16	1	19.5	11.3	13.9	11 000	9 900	7 000	13 000	6206 ZZ	6206 2RU	6206 2RD	6206 2RS	0.199
	72	19	1.1	26.7	15.0	13.3	9 600	8 600	6 400	12 000	6306 ZZ	6306 2RU	6306 2RD	6306 2RS	0.346
32	58	13	1	15.0	9.15	14.5	12 000	11 000	7 200	14 000	60/32 ZZ	60/32 2RU	60/32 2RD	60/32 2RS	0.127
	65	17	1	23.5	13.1	13.3	10 000	9 000	6 900	12 000	62/32 ZZ	62/32 2RU	62/32 2RD	62/32 2RS	0.228
	75	20	1.1	30.1	16.2	12.7	9 300	8 400	6 400	11 000	63/32 ZZ	63/32 2RU	63/32 2RD	63/32 2RS	0.437
35	47	7	0.3	4.75	3.85	16.5	13 000	—	7 400	16 000	6807 ZZ	6807 2RU	—	6807 2RS	0.030
	55	10	0.6	10.9	7.75	15.7	12 000	11 000	6 800	14 000	6907 ZZ	6907 2RU	6907 2RD	6907 2RS	0.073
	62	14	1	15.9	10.3	14.9	11 000	9 900	6 500	13 000	6007 ZZ	6007 2RU	6007 2RD	6007 2RS	0.155
	72	17	1.1	25.7	15.4	13.9	9 200	8 300	6 000	11 000	6207 ZZ	6207 2RU	6207 2RD	6207 2RS	0.288
	80	21	1.5	33.4	19.3	13.2	8 500	7 700	5 700	10 000	6307 ZZ	6307 2RU	6307 2RD	6307 2RS	0.457
40	52	7	0.3	4.95	4.20	16.3	12 000	11 000	6 700	14 000	6808 ZZ	6808 2RU	6808 2RD	6808 2RS	0.033
	62	12	0.6	13.7	9.95	15.6	11 000	9 900	6 100	13 000	6908 ZZ	6908 2RU	6908 2RD	6908 2RS	0.112
	68	15	1	16.7	11.5	15.2	10 000	9 000	5 800	12 000	6008 ZZ	6008 2RU	6008 2RD	6008 2RS	0.192
	80	18	1.1	29.1	17.8	14.0	8 300	7 500	5 400	10 000	6208 ZZ	6208 2RU	6208 2RD	6208 2RS	0.366
	90	23	1.5	40.7	24.0	13.2	7 700	6 900	5 100	9 200	6308 ZZ	6308 2RU	6308 2RD	6308 2RS	0.633
45	58	7	0.3	6.20	5.40	16.3	11 000	9 900	5 900	13 000	6809 ZZ	6809 2RU	6809 2RD	6809 2RS	0.040
	68	12	0.6	14.1	10.9	15.9	9 700	8 700	5 500	11 000	6909 ZZ	6909 2RU	6909 2RD	6909 2RS	0.132
	75	16	1	21.0	15.1	15.3	9 200	8 300	5 300	11 000	6009 ZZ	6009 2RU	6009 2RD	6009 2RS	0.245
	85	19	1.1	32.7	20.3	14.0	7 700	6 900	5 100	9 200	6209 ZZ	6209 2RU	6209 2RD	6209 2RS	0.407
	100	25	1.5	48.9	29.5	13.3	6 800	6 100	4 500	8 100	6309 ZZ	6309 2RU	6309 2RD	6309 2RS	0.833
50	65	7	0.3	6.60	6.10	16.1	9 600	8 600	5 200	11 000	6810 ZZ	6810 2RU	6810 2RD	6810 2RS	0.052
	72	12	0.6	14.5	11.7	16.1	9 000	—	5 000	11 000	6910 ZZ	6910 2RU	—	—	0.133
	80	16	1	21.8	16.6	15.6	8 400	7 600	4 800	9 900	6010 ZZ	6010 2RU	6010 2RD	6010 2RS	0.261
	90	20	1.1	35.1	23.3	14.4	7 100	6 400	4 600	8 500	6210 ZZ	6210 2RU	6210 2RD	6210 2RS	0.463
	110	27	2	62.0	38.3	13.2	6 100	5 500	4 100	7 300	6310 ZZ	6310 2RU	6310 2RD	6310 2RS	1.07
55	72	9	0.3	8.80	8.10	16.2	8 700	7 800	—	10 000	6811 ZZ	6811 2RU	6811 2RD	—	0.083
	80	13	1	16.6	14.1	16.2	8 100	7 300	4 500	9 600	6911 ZZ	6911 2RU	6911 2RD	6911 2RS	0.185
	90	18	1.1	28.3	21.2	15.3	7 600	6 800	4 300	8 900	6011 ZZ	6011 2RU	6011 2RD	6011 2RS	0.385
	100	21	1.5	43.4	29.4	14.4	6 300	5 700	4 100	7 600	6211 ZZ	6211 2RU	6211 2RD	6211 2RS	0.607
	120	29	2	71.6	45.0	13.2	5 600	—	3 700	6 700	6311 ZZ	6311 2RU	—	6311 2RS	1.37
60	78	10	0.3	11.5	10.6	16.3	8 000	7 200	—	9 400	6812 ZZ	6812 2RU	6812 2RD	—	0.104
	85	13	1	20.2	17.3	16.2	7 500	—	—	8 900	6912 ZZ	6912 2RU	—	—	0.192
	95	18	1.1	29.4	23.2	15.6	7 100	—	4 000	8 400	6012 ZZ	6012 2RU	—	6012 2RS	0.415

【備註】適用於以上軸承的標準保持架型式，請與威陵傳動聯繫+886-3-3235599

A


單列深溝滾珠軸承
帶防塵蓋
帶密封圈
d65~(105) mm

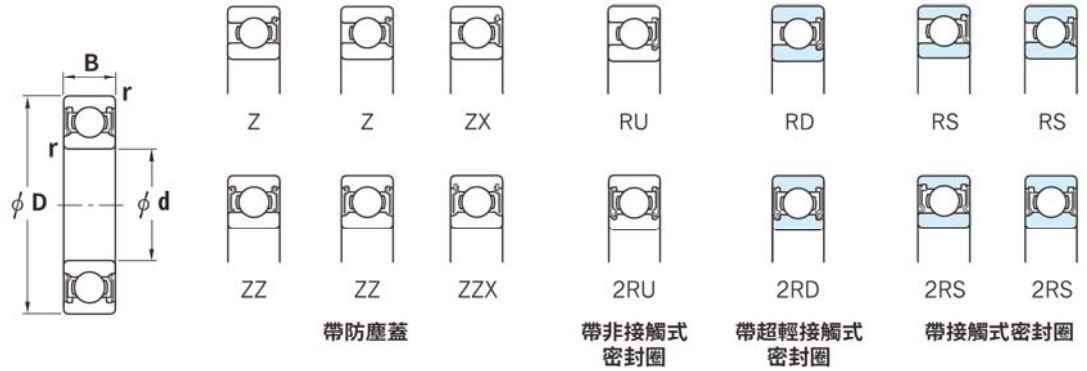

主要尺寸 (mm)				基本額定負荷 (kN)		系數 f_0	極限轉速 (min^{-1})				公稱型號				(參考) 質量 (kg) 開放型
d	D	B	r (最小)	C_r	C_{0r}		脂潤油		油潤滑		帶防塵蓋	帶非接觸式密封圈	帶超輕接觸式密封圈	帶接觸式密封圈	
							$\{Z, ZZ, RU, 2RU\}$	(RD, 2RD)	(RS, 2RS)	(Z)					
60	110	22	1.5	52.4	36.2	14.4	5 700	5 100	3 700	6 900	6212 ZZ	6212 2RU	6212 2RD	6212 2RS	0.783
	130	31	2.1	81.9	52.2	13.2	5 200	—	3 500	6 200	6312 ZZ	6312 2RU	—	6312 2RS	1.70
65	85	10	0.6	11.9	11.5	16.2	7 300	6 600	—	8 600	6813 ZZ	6813 2RU	6813 2RD	—	0.126
	90	13	1	17.4	16.1	16.6	7 100	6 400	3 900	8 400	6913 ZZ	6913 2RU	6913 2RD	6913 2RS	0.211
	100	18	1.1	30.5	25.2	15.8	6 600	—	3 700	7 800	6013 ZZ	6013 2RU	—	6013 2RS	0.435
	120	23	1.5	57.2	40.1	14.4	5 400	—	3 500	6 400	6213 ZZ	6213 2RU	—	6213 2RS	0.990
	140	33	2.1	92.7	59.9	13.2	4 800	—	3 200	5 800	6313 ZZ	6313 2RU	—	6313 2RS	2.08
70	90	10	0.6	12.1	11.9	16.1	6 800	6 100	—	8 100	6814 ZZ	6814 2RU	6814 2RD	—	0.134
	100	16	1	23.7	21.2	16.3	6 400	5 800	3 600	7 600	6914 ZZ	6914 2RU	6914 2RD	6914 2RS	0.342
	11	20	1.1	38.1	30.9	15.6	6 100	—	3 500	7 200	6014 ZZ	6014 2RU	—	6014 2RS	0.602
	12	24	1.5	62.2	44.1	14.5	5 100	—	3 300	6 100	6214 ZZ	6214 2RU	—	6214 2RS	1.07
	15	35	2.1	104	68.2	13.2	4 500	—	3 000	5 400	6314 ZZ	6314 2RU	—	6314 2RS	2.52
75	9	10	0.6	12.5	12.9	16.0	6 400	5 800	—	7 600	6815 ZZ	6815 2RU	6815 2RD	—	0.142
	10	16	1	24.4	22.6	16.5	6 100	—	—	7 200	6915 ZZ	6915 2RU	—	—	0.363
	11	20	1.1	39.6	33.5	15.8	5 700	—	3 300	6 800	6015 ZZ	6015 2RU	—	6015 2RS	0.638
	13	25	1.5	67.4	48.3	14.5	4 800	—	3 100	5 800	6215 ZZ	6215 2RU	—	6215 2RS	1.18
	16	37	2.1	113	77.2	13.2	4 200	—	2 800	5 000	6315 ZZ	6315 2RU	—	6315 2RS	3.02
80	10	10	0.6	12.7	13.3	16.0	6 100	5 500	—	7 200	6816 ZZ	6816 2RU	6816 2RD	—	0.150
	11	16	1	25.0	24.0	16.6	5 700	5 100	3 200	6 800	6916 ZZ	6916 2RU	6916 2RD	6916 2RS	0.382
	12	22	1.1	47.6	39.8	15.6	5 300	—	3 100	6 300	6016 ZZ	6016 2RU	—	6016 2RS	0.850
	14	26	2	72.7	53.0	14.6	4 500	—	2 900	5 400	6216 ZZ	6216 2RU	—	6216 2RS	1.40
	17	39	2.1	123	86.7	13.3	3 900	—	2 700	4 700	6316 ZZ	6316 2RU	—	6316 2RS	3.59
85	11	13	1	18.7	19.0	16.2	5 600	5 000	—	6 600	6817 ZZ	6817 2RU	6817 2RD	—	0.266
	12	18	1.1	31.9	29.6	16.4	5 300	4 800	3 000	6 300	6917 ZZ	6917 2RU	6917 2RD	6917 2RS	0.535
	13	22	1.1	49.5	43.1	15.8	5 000	—	2 900	5 900	6017 ZZ	6017 2RU	—	6017 2RS	0.890
	15	28	2	84.0	61.9	14.5	4 200	—	2 700	5 000	6217 ZZ	6217 2RU	—	6217 2RS	1.79
	18	41	3	133	96.8	13.3	3 700	—	2 500	4 400	6317 ZZ	6317 2RU	—	6317 2RS	4.23
90	11	13	1	19.0	19.7	16.1	5 300	4 800	—	6 300	6818 ZZ	6818 2RU	6818 2RD	—	0.279
	12	18	1.1	32.8	31.6	16.5	5 100	4 600	2 800	6 000	6918 ZZ	6918 2RU	6918 2RD	6918 2RS	0.565
	14	24	1.5	58.2	49.7	15.6	4 700	—	2 700	5 600	6018 ZZ	6018 2RU	—	6018 2RS	1.16
	16	30	2	96.1	71.5	14.5	3 900	—	2 600	4 700	6218 ZZ	6218 2RU	—	6218 2RS	2.15
	19	43	3	143	107	13.3	3 500	—	2 400	4 200	6318 ZZ	6318 2RU	—	6318 2RS	4.91
95	13	18	1.1	33.7	33.5	16.6	4 800	4 300	2 700	5 700	6919 ZZ	6919 2RU	6919 2RD	6919 2RS	0.705
	14	24	1.5	60.4	53.9	15.8	4 400	—	2 500	5 200	6019 ZZ	6019 2RU	—	6019 2RS	1.21
	17	32	2.1	109	81.9	14.4	3 700	—	2 400	4 400	6219 ZZ	6219 2RU	—	6219 2RS	2.62
	20	45	3	153	119	13.3	3 300	—	2 200	4 000	6319 ZZ	6319 2RU	—	6319 2RS	5.67
100	125	13	1	19.6	21.2	16.0	4 800	4 300	—	5 700	6820 ZZ	6820 2RU	6820 2RD	—	0.309
	140	20	1.1	45.0	41.9	16.2	4 500	—	—	5 300	6920-1 ZZ	6920-1 2RU	—	—	0.960
	150	24	1.5	60.2	54.2	15.9	4 300	—	2 500	5 100	6020 ZZ	6020 2RU	—	6020 2RS	1.25
	180	34	2.1	122	93.1	14.4	3 500	—	2 300	4 200	6220 ZZ	6220 2RU	—	6220 2RS	3.14
	215	47	3	173	141	13.2	3 000	—	2 100	3 600	6320 ZZ	6320 2RU	—	6320 2RS	7.00
105	145	20	1.1	46.5	44.8	16.4	4 300	—	2 400	5 100	6921-1 ZZ	6921-1 2RU	—	6921-1 2RS	1.00
	160	26	2	72.3	65.8	15.8	4 000	—	2 300	4 700	6021 ZZ	6021 2RU	—	6021 2RS	1.59
	190	36	2.1	133	105	14.4	3 300	—	2 200	3 900	6221 ZZ	6221 2RU	—	6221 2RS	3.70
	225	49	3	184	153	13.2	2 900	—	2 000	3 500	6321 ZZ	6321 2RU	—	6321 2RS	8.05

[備註] 適用於以上軸承的標準保持架型式，請與威峻傳動聯繫+886-3-3235599

單列深溝滾珠軸承
帶防塵蓋
帶密封圈
d110~(220) mm

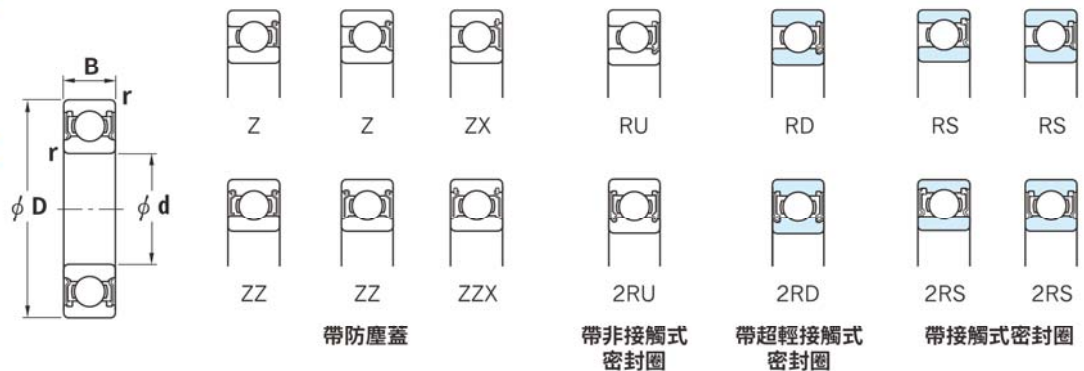

主要尺寸 (mm)				基本額定負荷 (kN)		系數 f_0	極限轉速 (min^{-1})				公稱型號				(參考) 質量 (kg) 開放型
d	D	B	r (最小)	C_r	C_{0r}		脂潤油		油潤滑		帶防塵蓋	帶非接觸式密封圈	帶超輕接觸式密封圈	帶接觸式密封圈	
							$\left[\begin{matrix} Z, ZZ \\ RU, 2RU \end{matrix} \right]$	(RD, 2RD)	(RS, 2RS)	(Z)					
110	140	16	1	28.1	30.7	16.1	4 300	3 900	—	5 100	6822 ZZ	6822 2RU	6822 2RD	—	0.606
	150	20	1.1	47.9	47.8	16.4	4 100	—	—	4 900	6922 ZZ	6922 2RU	—	—	1.04
	170	28	2	82.0	73.0	15.6	3 800	—	2 200	4 500	6022 ZZX	6022 2RU	—	6022 2RS	1.96
	200	38	2.1	144	117	14.4	3 100	—	2 000	3 700	6222 ZZX	6222 2RU	—	6222 2RS	4.36
	240	50	3	205	180	13.2	2 700	—	1 900	3 200	6322 ZZX	6322 2RU	—	6322 2RS	9.54
120	150	16	1	29.0	33.0	16.0	4 000	—	—	4 700	6824 ZZ	6824 2RU	—	—	0.655
	165	22	1.1	57.2	56.9	16.4	3 800	—	—	4 400	6924 ZZ	6924 2RU	—	—	1.41
	180	28	2	85.0	79.3	15.9	3 600	—	2 100	4 200	6024 ZZX	6024 2RU	—	6024 2RS	2.07
	215	40	2.1	155	131	14.4	2 900	—	1 900	3 400	6224 ZZX	6224 2RU	—	6224 2RS	5.15
	260	55	3	207	185	13.5	2 500	—	—	3 000	6324 ZZX	—	—	—	12.5
130	165	18	1.1	36.9	41.2	16.1	3 600	—	—	4 300	6826 ZZ	6826 2RU	—	—	0.939
	180	24	1.5	65.2	67.4	16.3	3 400	—	—	4 100	6926-1 ZZ	6926-1 2RU	—	—	1.86
	200	33	2	106	101	15.8	3 200	—	1 900	3 800	6026 ZZX	6026 2RU	—	6026 2RS	3.16
	230	40	3	167	146	14.5	2 700	—	1 800	3 200	6226 ZZX	6226 2RU	—	6226 2RS	5.82
	280	58	4	229	214	13.6	2 300	—	—	2 700	6326 ZZX	—	—	—	15.1
140	175	18	1.1	38.2	44.4	16.0	3 400	3 100	—	4 000	6828 ZZ	—	6828 2RD	—	1.00
	190	24	1.5	71.3	74.8	16.5	3 200	—	—	3 800	6928-1 ZZ	6928-1 2RU	—	—	1.98
	210	33	2	110	109	15.9	3 000	—	1 800	3 600	6028 ZZX	6028 2RU	—	6028 2RS	3.55
140	250	42	3	166	150	14.8	2 400	—	1 600	2 900	6228 ZZX	6228 2RU	—	6228 2RS	7.45
	300	62	4	253	246	13.6	2 100	—	—	2 500	6328 ZZX	—	—	—	19.4
150	210	28	2	93.4	94.3	16.2	2 900	—	1 700	3 400	6930 ZZ	6930 2RU	—	6930 2RS	3.05
	225	35	2.1	125	126	16.0	2 800	—	1 600	3 300	6030 ZZX	6030 2RU	—	6030 2RS	4.22
	270	45	3	176	168	15.1	2 200	—	—	2 700	6230 ZZX	—	—	—	9.41
160	200	20	1.1	48.4	56.9	16.1	2 900	2 600	—	3 400	6832 ZZ	—	6832 2RD	—	1.45
	240	38	2.1	136	135	15.9	2 600	—	1 500	3 000	6032 ZZX	6032 2RU	—	6032 2RS	5.22
	290	48	3	185	186	15.4	2 100	—	—	2 500	6232 ZZX	—	—	—	14.3
170	215	22	1.1	59.8	70.5	16.1	2 700	—	—	3 200	6834 ZZ	—	—	—	1.90
	260	42	2.1	161	161	15.8	2 400	—	—	2 800	6034 ZZX	6034 2RU	—	—	6.80
	310	52	4	212	223	15.3	1 900	—	—	2 300	6234 ZZX	—	—	—	17.5
180	225	22	1.1	60.7	73.1	16.1	2 600	2 300	—	3 000	6836 ZZ	—	6836 2RD	—	2.00
	280	46	2.1	182	194	15.8	2 200	—	—	2 600	6036 ZZX	6036 2RU	—	—	10.3
	320	52	4	227	241	15.1	1 800	—	—	2 200	6236-1 ZZX	—	—	—	18.3
190	240	24	1.5	73.1	88.1	16.1	2 400	—	—	2 800	6838 ZZ	—	—	—	2.60
	290	46	2.1	188	201	15.8	2 100	—	—	2 500	6038 ZZX	—	—	—	10.8
200	310	51	2.1	217	243	15.6	1 900	—	—	2 300	6040 ZZX	—	—	—	14.0
	360	58	4	269	311	15.2	1 600	—	—	1 900	6240-1 ZZX	—	—	—	28.2
220	340	56	3	235	271	15.6	1 700	—	—	2 000	6044 ZZX	—	—	—	18.3

【備註】適用於以上軸承的標準保持架型式，請與威陵傳動聯繫+886-3-3235599

