


## WJ-HC-C 鋼片聯軸器 /Plate Flexible Coupling

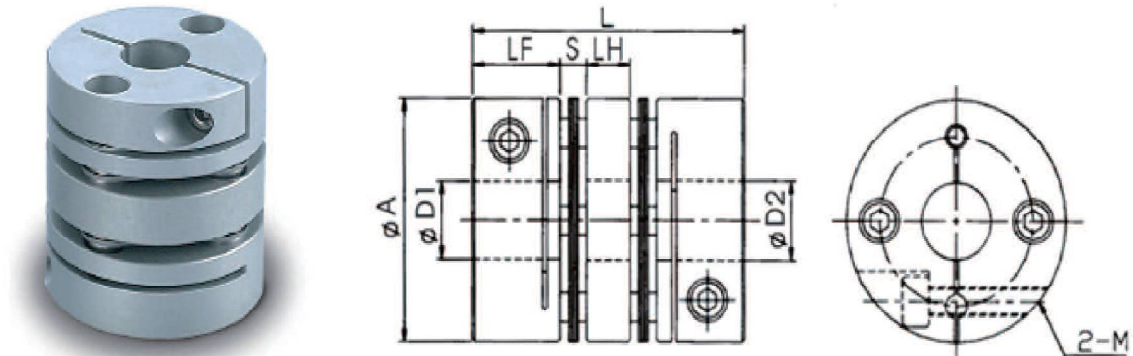

WJ-HC-  C -  -

外徑  
Diameter                      D1      D2

尺寸表 / Dimension

單位 /unit:mm

規格 NO.	A	LF	S	LH	L	M	G	D1·D2 公差 Tolerance(H8)	
								min	max
WJ-HC-27C	27	10.8	2.9	7.5	34.9	M3	3.5	5	11
WJ-HC-35C	35	12	3	8	38	M3	4.5	6	15
WJ-HC-40C	40	15.5	3.3	10	47.6	M4	4.8	8	16
WJ-HC-45C	45	15.5	3.6	10	48.2	M4	4.8	10	19
WJ-HC-56C	56	20.5	4	13	62	M5	6.5	12	25
WJ-HC-68C	68	24.5	4.2	16	73.4	M6	7.2	14	32
WJ-HC-82C	82	29.8	8.8	21.5	98.7	M8	9	19	35
WJ-HC-94C	94	30	9.4	22	100.8	M8	9	22	45

特性表 /Specification

規格 No.	常用扭力 Rated Torque (N.m)	最大扭力 Max. Torque (N.m)	容許誤差 Allowable Misalignment			最高轉數 Max. Ro tational (rpm)	慣性矩 Moment of Inertia (Kg.m <sup>2</sup> )	重量 Weight (g)
			偏心 Eccentricity (mm)	偏角 Angularity (°)	軸向 Axial (mm)			
WJ-HC-27C	1.8	3.6	0.15	1	±0.33	10000	3.41×10 <sup>-6</sup>	35
WJ-HC-35C	4	8	0.17	1	±0.40	10000	11.3×10 <sup>-6</sup>	62
WJ-HC-40C	6	14	0.23	1	±0.50	10000	26.3×10 <sup>-6</sup>	116
WJ-HC-45C	10	20	0.23	1	±0.60	10000	41.7×10 <sup>-6</sup>	131
WJ-HC-56C	25	52	0.27	1	±0.80	10000	136.1×10 <sup>-6</sup>	310
WJ-HC-68C	60	124	0.31	1	±0.90	10000	366.9×10 <sup>-6</sup>	365
WJ-HC-82C	100	200	0.52	1	±1.10	10000	1070×10 <sup>-6</sup>	1300
WJ-HC-94C	180	360	0.5	1	±1.3	10000	1750×10 <sup>-6</sup>	1500

◆ 特性 / Features

- 高剛性 / High Rigidity
- 高扭力 / High Torque
- 低慣性 / Low Moment of Inertia
- 零背隙 / Backlash-free
- 適用於伺服馬達 / Applicable for Servo Motor
- 緩衝材：不銹鋼彈片 / Buffer Material : Stainless
- 固定方式：夾緊式 / Fix type:Clamping

聯軸器