




## WJ-HS-C 鋼片聯軸器 / Plate Flexible Coupling

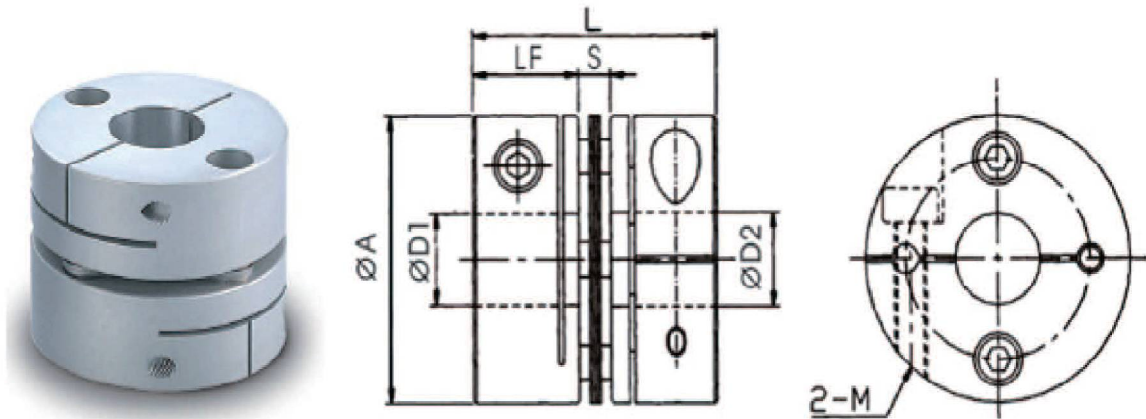

WJ-HS-  C -  -

外徑                      D1                      D2  
Diameter

尺寸表 / Dimension

單位 /unit:mm

規格 NO.	A	LF	S	L	M	D1 - D2/ 公差 Tolerance(H8)	
						min	max
WJ-HS-27C	27	10.8	2.9	24.5	M3	5	11
WJ-HS-35C	35	12	3	27	M3	6	15
WJ-HS-40C	40	15.5	3.3	34.3	M4	8	16
WJ-HS-45C	45	15.5	3.6	34.6	M4	10	19
WJ-HS-56C	56	20.5	4	45	M5	12	25
WJ-HS-68C	68	24.5	4.2	53.2	M6	14	32
WJ-HS-82C	82	29.8	8.8	68.4	M8	19	35
WJ-HS-94C	94	30	9.4	69.4	M8	22	45

特性表 / Specification

規格 No.	常用扭力 Rated Torque (N.m)	最大扭力 Max. Torque (N.m)	容許誤差 Allowable Misalignment			最高轉數 Max. Ro tational (rpm)	慣性矩 Moment of Inertia (Kg.m 2)	重量 Weight (g)
			偏心 Eccentricity (mm)	偏角 Angularity (°)	軸向 Axial (mm)			
WJ-HS-27C	1.8	3.6	0.02	1	±0.15	10000	2.47×10 <sup>-6</sup>	25
WJ-HS-35C	4	8	0.02	1	±0.20	10000	8.16×10 <sup>-6</sup>	48
WJ-HS-40C	6	14	0.02	1	±0.25	10000	18.5×10 <sup>-6</sup>	90
WJ-HS-45C	10	20	0.02	1	±0.30	10000	29.7×10 <sup>-6</sup>	98
WJ-HS-56C	25	52	0.02	1	±0.40	10000	100.0×10 <sup>-6</sup>	238
WJ-HS-68C	60	124	0.02	1	±0.50	10000	267.7×10 <sup>-6</sup>	470
WJ-HS-82C	100	200	0.02	1	±0.55	10000	736.5×10 <sup>-6</sup>	1050
WJ-HS-94C	180	360	0.02	1	±0.60	10000	1220×10 <sup>-6</sup>	1230

◆ 特性 / Fratures

- 高剛性 / High Rigidity
- 高扭力 / High Torque
- 低慣性 / Low Moment of Inertia
- 零背隙 / Backlash-free
- 適用於伺服馬達 / Applicable for Servo Motor
- 緩衝材：不銹鋼彈片 / Buffer Material : Stainless
- 固定方式：夾緊式 / Fix type:Clamping

聯軸器